

- Converts HD-TVI/AHD/CVI into HDMI signal
- 4K BNC input resolution supported
- 1080p HDMI output
- HD-TVI/AHD/CVI loop out
- 75Ω/Hi-Z setting switch



TVI/AHD/CVI to HDMI converter

CVI / TVI / AHD + CVBS to HDMI, HDMI output 1080P 60Fps, connect to HDMI output cable, HD-LINK light, display yellow light.

Support up to AHD / TVI / CVI 8MP input, with HD-TVI/AHD/CVI/CVBS loop out

Auto recognition of signal input resolution 720P / 1080P / 3MP / 4MP / 5MP / 8MP resolution with visual LED display

When the IN port of the converter is connected to the camera, and the BNC OUT is not connected set the impedance switch to 75Ω.


When the IN port of the converter is connected to the camera and the BNC OUT port is connected to the DVR, please set to HI-Z

The device uses 5V 1A power supply, and has power indicator status LED



TVI-HDMI-4K

TVI/AHD/CVI to HDMI converter

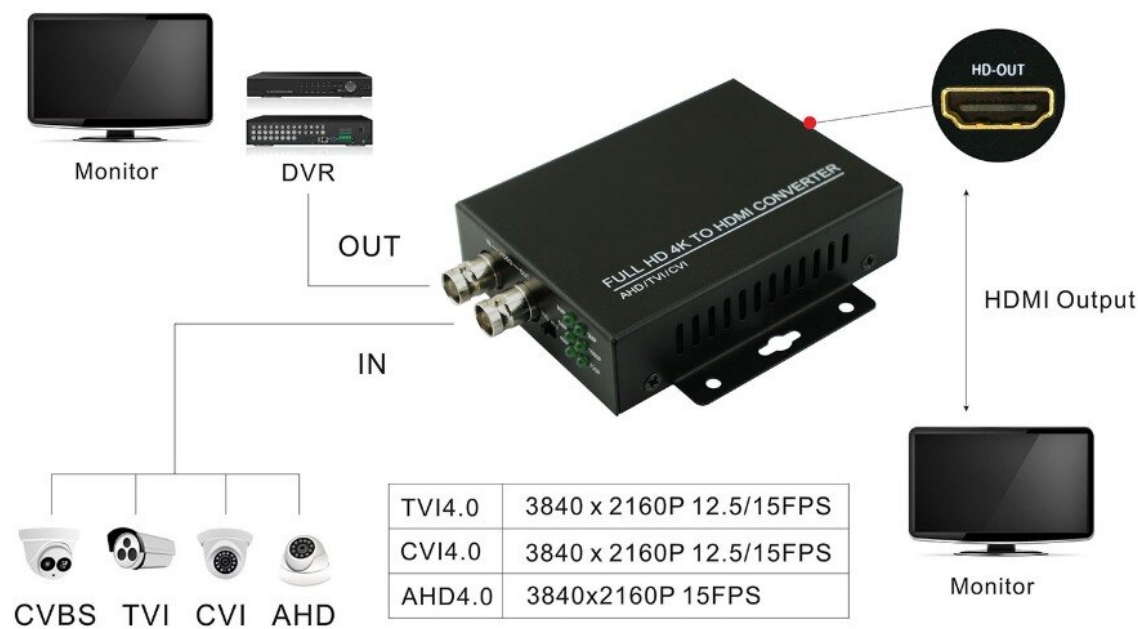

Resolution	CVI	TVI	AHD
720P	1280 x 720P 25/30/50/60 FPS	1280 x 720P 25/30/50/60 FPS	1280 x 720P 25/30 FPS
1080P	1920 x 1080P 25/30 FPS	1920 x 1080P 25/30 FPS	1920 x 1080P 25/30 FPS
3 MP	—	2048 x 1536P 18/25/30 FPS	2048 x 1536P 18/25/30 FPS
4MP	2560 x 1440P 25/30 FPS	2688 x 1520P 15FPS 2560 x 1440P 15/25/30 FPS	2560 x 1440P 15/25/30 FPS
5MP	—	2592 x 1944P 12.5/20 FPS	2592 x 1944P 12.5/20FPS
4K (8MP)	3840 x 2160 12.5/15 FPS	3840 x 2160 15 FPS	3840*2160 15 FPS