



Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- Support TVI (4MP/5MP) Cameras :300M;
- Support AHD(4MP/5MP)Cameras:500M;
- Support CVI (2MP/4MP)Cameras:500M;
- High fidelity digital processing, brilliant and vivid video.
- 3D digital noise reduction technology;
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Contrast enhancement




Natural color



Detail enhancement



120Hz Dynamic processing

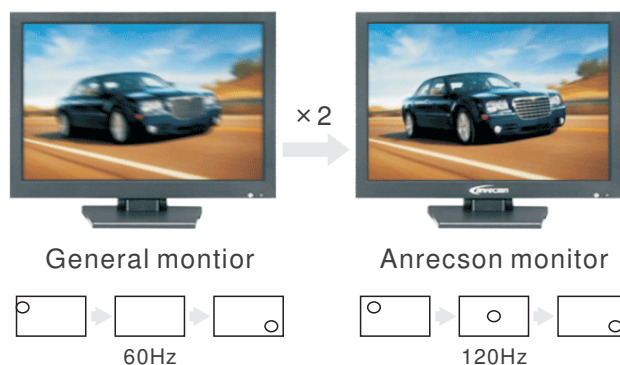

DISPLAY CHARACTERISTICS

Mode Name	LC-MS1003
Screen Size	10.1"
Active Display Area (mm)	211.2mm(W)×158.4mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.630(H)×0.630(V)
Brightness(nits)	350cd/m²
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	2
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO

Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way

Power	DC12V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦10W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/4.5kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

