
DIGI-PSTN/VOICE COMMUNICATIONS MODULE

ATS level: SP2 Environmental Class (EC) II

This modem card is used to communicate either via Contact ID. Fast Format, SIA or SMS. It will also enable remote uploading/downloading via a PC to the control panel. In addition to conventional PSTN functions this module also adds Voice Call functionality to Voice Call compatible systems (UK Enforcer V10).

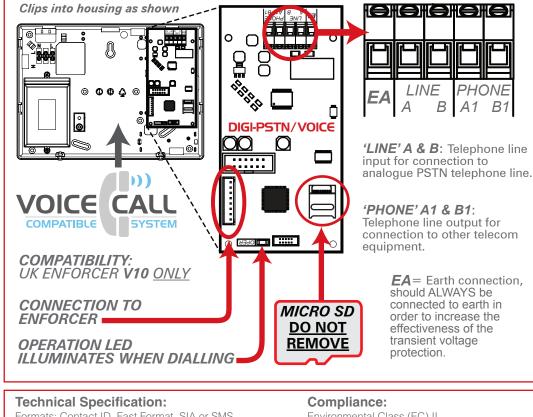

Formats: Contact ID. Fast Format, SIA or SMS Supports upload/downloading, Voice Calling functions Baud Rate: 1200bps Voltage: 12V.d.c. Quiescent: 20mA (In use: 40mA) Dimensions: 109 x 56 x 13mm Declaration of operation mode: Pass-through

Environmental Class (EC) II ATS level: SP2 EN 61000-6-3:2007 + A1: 2011 EN 50130-4: 2011 EN 60950-1:2006 + A12: 2011 ETSI ES 203 021-1 V2.1.1/-2 V2.1.2/-3 V2.1.2 EN 50136-1: 2012 EN 50136-2: 2013

protection.

LINE

В

EA = Earth connection.

www.pyronix.com

should ALWAYS be

Warrantv

For electrical products sold within the European Community. At the end of the electrical products useful life, it should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice in your country. Please see the Enforcer 32-WE user, programming and quick set up manuals for further information. The warranty for this product is 2 years, for more information please visit:

www.pyronix.com/warranty

Pyronix Limited, Pyronix House, Braithwell Way, Hellaby, Rotherham, S66 8QY, UK

The second secon

Customer.support@pyronix.com

DIGI-PSTN/VOICE COMMUNICATIONS MODULE



B1

ATS level: SP2 Environmental Class (EC) II

HIKVISION

CE

PHONE

B1

This modem card is used to communicate either via Contact ID. Fast Format. SIA or SMS. It will also enable remote uploading/downloading via a PC to the control panel. In addition to conventional PSTN functions this module also adds Voice Call functionality to Voice Call compatible systems (UK Enforcer V10).

Clips into housing as shown (=)::(=)::(=)::(=)::(=): Ο 0 OI (8) N g 2 \cap 888 Ō 10 PH LINE PHONE **00**4 ⊚ ര EA В A1 Ē ° **DIGI-PSTN/VOICE** \bigcirc 'LINE' A & B: Telephone line 00 ŝ input for connection to analogue PSTN telephone line. VOICE CAL 'PHONE' A1 & B1: Telephone line output for COMPATIBLE SYSTEM connection to other telecom HIJOLEK equipment. **COMPATIBILITY**: UK ENFORCER V10 ONLY **EA** = Earth connection. should ALWAYS be CONNECTION TO connected to earth in MICRO SD **ENFORCER** order to increase the DO NOT effectiveness of the transient voltage REMOVE **OPERATION LED** protection. ILLUMINATES WHEN DIALLING

Technical Specification:

Formats: Contact ID. Fast Format. SIA or SMS Supports upload/downloading, Voice Calling functions Baud Rate: 1200bps Voltage: 12V.d.c. Quiescent: 20mA (In use: 40mA) Dimensions: 109 x 56 x 13mm Declaration of operation mode: Pass-through

Warranty

For electrical products sold within the European Community. At the end of the electrical products useful life, it should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice in your country. Please see the Enforcer 32-WE user, programming and quick set up manuals for further information. The warranty for this product is 2 years, for more information please visit:

www.pyronix.com/warranty

1709 535 225 0845 6434 999 (UK). +44(0)

Customer.support@pyronix.com

Compliance:

EN 50130-4: 2011

EN 50136-1: 2012

EN 50136-2: 2013

ATS level: SP2

Environmental Class (EC) II

EN 61000-6-3:2007 + A1: 2011

EN 60950-1:2006 + A12: 2011

ETSI ES 203 021-1 V2.1.1/-2 V2.1.2/-3 V2.1.2

(i) www.pvronix.com

Pyronix Limited, Pyronix House, Braithwell Way, Hellaby, Rotherham, S66 8QY, UK